



# High Performance Filament and Reinforced Strapping Tapes



*“Clip” production costs for non-standard packages*

**IF YOU HAVE...**  
**Slippery issues**  
with water-activated  
gummed tape  
**Sticky issues**  
with adhesives  
**Bundling issues**  
with steel or plastic  
strapping  
**Sore points**  
about staples


S-867 single head applicator



S-867 II dual head applicator

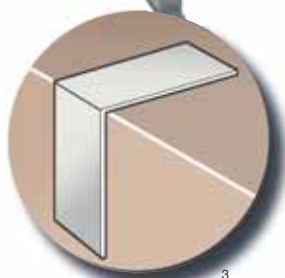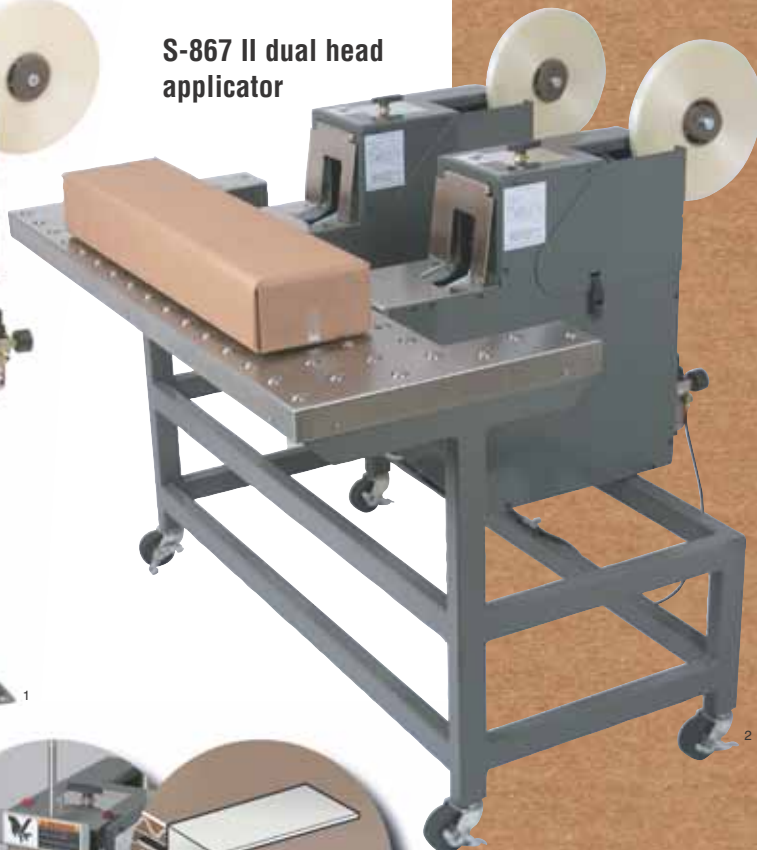

L-Clip

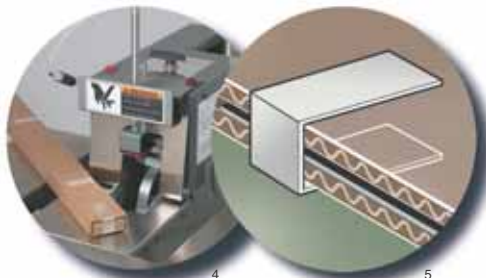


Optional U-Clip adapter for lower profile packages

## Versatility and dependable, secure closure

Scotch® High Performance Filament and Reinforced Strapping Tapes secure packages with maximum holding power and durability.

For five panel folds, full overlap, telescoping, tuck fold and other non-standard packages, the 3M-Matic™ L-Clip Applicators S-867 and S-867 II provide cost-effective, time-saving solutions by applying pre-fed 4.5" clips of tape securely with less effort. Apply clips at up to 50 per minute.

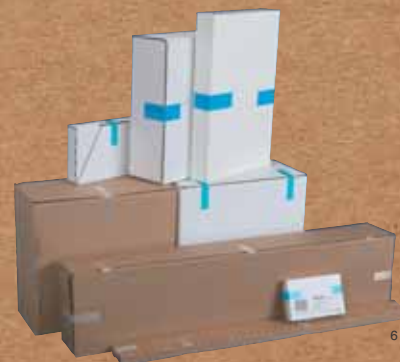

Box capacities –  
Length: 2.25" to no limit  
Width: 5" to no limit  
Height: 2.25" to no limit

## 3M-Matic™ L-Clip Applicators S-867 and S-867 II Performance Features

- Quickly, accurately and reliably close a variety of non-standard packages including those as narrow as 1.5" when using the optional narrow box attachment
- Consistent tape leg length of 4.5" helps prevent waste
- Apply clips of Scotch® Filament and Reinforced Strapping Tapes up to 36mm wide
- Durable rollers buff tape down for consistently secure closures
- Air pressure and flow controls positioned to reduce unnecessary adjustments, improve ease of maintenance, access, and increase floor layout options
- Oil-less operation helps reduce maintenance
- Convenient access cover for easy tape threading
- Service interlock valve designed for safety

- Package contact plate activates tape application easily and safely
- Compact and easy to install
- Heavy duty one-piece frame for durability and stability
- Non-electric for economical compressed air operation

With optional U-Clip adapter, the unit applies U-clips on flat materials from 1/4" to 1" thick with the same speed and accuracy as L-Clips.

Starting with the same features as the S-867, the S-867 II dual head configuration simultaneously applies two L-Clips side by side as close as 8" apart. Packages are easily moved and positioned across the stainless steel roller ball work surface.



"U" Clip Package



Telescoping Box



Custom Box



One Piece Box



F.O.L.



Five Panel Box

### Scotch® Reinforced Strapping Tapes for your best image

With this unique transparent mono-filament tape, package graphics show through to best advantage.

- Bar code scannable in most applications
- High tensile strength and resists nicks and abrasion
- Combination of unique features and pricing add up to better value



### Dispensers for manual and off-line closure



Scotch® Filament Tape Hand Dispenser H133 applies L-clips with one hand.



Scotch® Manual Filament Tape Box Sealer S634 applies L-clips as a package is slid across the sealer's top surface.

**Product Use:** User is responsible for determining whether the product is fit for a particular purpose and suitable for user's method of application.

**Warranty and Limited Remedy:** THE FOLLOWING WARRANTIES ARE MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, A CUSTOM OR USAGE OF TRADE: 3M warrants that its 3M-Matic™ L-Clip Applicators S-867 and S-867 II will be free from all defects for ninety (90) days after delivery.

If any 3M-warranted part is proved to be defective within its warranty period, then the exclusive remedy and 3M's and seller's sole obligation shall be, at 3M's option, to repair or replace the part, provided the defective part is returned immediately to 3M's factory or an authorized service station designated by 3M. A part will be presumed to have become defective after its warranty period unless the part is received or 3M is notified of the problem no later than five (5) calendar days after the warranty period. If 3M is unable to repair or replace the part within a reasonable time, then 3M, at its option, will replace the equipment or refund the purchase price. 3M shall have no obligation to provide or pay for the labor required to install the repaired or replacement part. 3M shall have no obligation to repair or replace (1) those parts failing due to operator misuse, carelessness, or due to any accidental cause other than equipment failure, or (2) parts failing due to non-lubrication, inadequate cleaning, improper operating environment, improper utilities or operator error.

**Limitation of Liability:** 3M and seller shall not be liable for direct, indirect, special, incidental or consequential damages based upon breach of warranty, breach of contract, negligence, strict liability or any other legal theory.

The foregoing Warranty and Limited Remedy and Limitation of Liability may be changed only by a written agreement signed by authorized officers of 3M and seller.



### Industrial and Transportation Business Industrial Adhesives and Tapes Division

3M Center Bldg. 21-1W-10  
900 Bush Ave.  
St. Paul, MN 55144  
1-800-362-3550  
www.3M.com/packaging

3M-Matic and 3M are trademarks of 3M Company. Scotch is a registered trademark of 3M Company. Please recycle. Printed in U.S.A. © 2007. All rights reserved.

70-0710-0354-8