

A **DURAVANT** COMPANY



MACHINE FEATURES

- Ultra-compact rugged steel construction
- Laser cut and CNC machined components for maximum precision
- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Electronic controls ensure smooth operation and easy integration into existing production facilities
- Safety system on seal jaws prevents seal jaw or package damage in case of product jams
- Adjustable seal bar opening allows operator to raise or lower seal line to improve package appearance
- Powered film feed top and bottom rolls automatically adjust to varying depths and heights of intermixed bundles
- Welded seam ensures consistent seals, stronger than the film itself. No open seams for consistent looking packages
- Seal cleaning film cut off hot knife burns through film cleanly with no film residue build up on the knife

SPECIFICATIONS

Speed

 Manually fed and manually operated seal bars or up to 15 bundles per minute

Power Requirements

Electrical

• 120VAC, 1Ph, 60Hz, 15A Pneumatic

• 80 psi, 2 CFM

Film

- Max. film width: 37" single-wound
- Max. film roll diameter: 14" with 3" core
- Film gauge: 1-3 mil.
- Film type: polyethylene or low density polyethylene (L.D.P.E.)


Product Sizes	Width	Length	Height
	6"-35"	6"-18"	6"-18"



Note: Final Layout May Vary 42" 96" HVP4/488

OPTIONS

- Stainless-steel construction
- Extended gravity discharge for long packages
- Casters for machine portability
- · Roller infeed
- · Power discharge

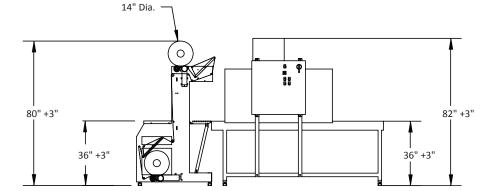



User-Friendly Operator Controls



Seal Cleaning Film Cut-off



Powered Film Feed

Complete Aftermarket Service & Support for Your Packaging Equipment



A **DURAVANT** SERVICE

Call 844.777.8776 for your regional tech

24/7 Help Available





ARPAC IS A MEMBER OF THE **DURAVANT** FAMILY OF COMPANIES

PACKAGING SOLUTIONS | FOOD PROCESSING SOLUTIONS | MATERIAL HANDLING SOLUTIONS | SUPPORTPRO

